


Ultimum - LPS 1175 SR4

Specification

- Certified security to LPS 1175 Issue 7 SR4
- Single and double leaf configuration
- Outward and inward opening
- Multi-point locking system
- Panic or lever exit with modular ASSA ABLOY specified hardware
- Drill resistant cylinder, thumbturn and escutcheon
- Optional access control compatibility
- Heavy-duty stainless steel dog bolt hinges
- High security dog bolt pins
- Vision panels available
- The use of ASSA ABLOY tested hardware is strongly recommended since the choice of hardware can greatly affect security performance and maintenance
- Fire rating available up to FD60

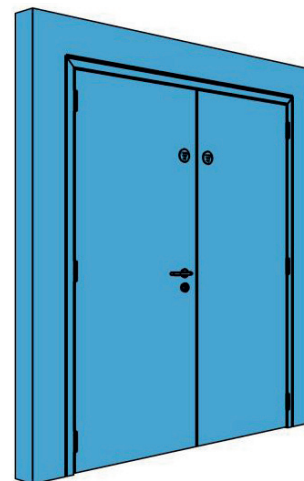

Standards

- LPS 1175 Issue 7
- Upgradable to BSEN 1634-1: 2008
- BSEN ISO 140 Part 3



Applications



Government buildings



Industrial units



Leisure



Public facilities



Transport hubs



Power generation



Healthcare



Education



Utilities



Museums and art

Technical Data

- Typical insulation value: 2.5 W/m²k
- Heavy-duty stainless steel dog bolt hinges provide resistance to attack
- Seperate heavy-duty dog pins provide additional resistance to attack
- Minimum size available: 760mm W x 1800mm H
- Maximum size available: 1200mm W x 2400mm H
- Vision panels available, please contact us for further information
- On double doors, heavy-duty tower bolts lock inactive door leaf

Door Leaf and Frame

- Door leaves manufactured from laminated solid hardwood incorporating steel reinforcements
- Doors are internally reinforced to provide protection against physical attack such as impact and cutting
- Doors are complete with heavy-duty hardware reinforcements
- Door edges are bevelled for ease of operation and close fit
- Doors are fitted with heavy-duty hinges and include heavy-duty security dog bolt pins for extra protection
- Door leaf thickness - 67mm
- Anti-jemmy security astragal integrated within door construction to the leading edge
- Solid hardwood frame with steel reinforcement as required to provide additional protection against targeted attack